

TX-I/O™

## Super universal modules TXM1.8X TXM1.8X-ML

- **Two fully compatible versions:**
  - TXM1.8X: 8 inputs/outputs with LED signal / fault indication
  - TXM1.8X-ML: As TXM1.8X, but with additional local override facility with LCD display (LO/ID to ISO 16 484-2)
- **8 universal I/O points, individually configurable as**
  - Digital input: maintained contact, pulse or counter
  - Analog input: sensor, 0..10V, 4..20mA
  - Analog output: 0..10V, 4..20mA (I/O points 5 ... 8)
- **Compact DIN format, small footprint**
- **Separate terminal base and plug-in I/O module for convenient handling**
  - Self-establishing bus connection for maximum ease of installation
  - Terminal isolation function for fast commissioning
  - I/O module replaceable in seconds, without rewiring and without affecting the full functioning of the remaining I/O modules
- **All terminals are directly on the I/O modules, allowing direct connection of field devices without additional terminal strips.**
- **Simple strategy for operation and display**
  - I/O status LED for each I/O point; mode of operation (N/C or N/O) and brightness depend on I/O function
  - LEDs and LCD for fast diagnostics
- **Double-sided labels for identification of all I/O points**

## Functions

---

The modules support the following I/O functions:

Function	Signal type	Description
Status signal	D20 D20R	Volt-free, N/O or N/C contact, interrogation (maintained contact)
Status pulses	D20S	Volt-free, N/O or N/C, interrogation (pulse)
Counter pulses	C	Volt-free, N/O contact, interrogation (pulse) Counting frequency max. 25 Hz
Voltage, current, resistance and temperature	U10	DC voltage 0 ... 10 V
	I420	DC current 4 ... 20 mA
	I25	DC current 0 ... 20 mA <i>Please note that the max. current is 20 mA!</i>
	R1K	Temperature sensor LG-Ni 1000 ohms
	P1K	Resistance Pt 1000 ohms and resistance transmitter
T1	Temperature sensor PTC	
Proportional output signals	Y10S	Proportional control output, DC 0 ... 10 V, with storage of control value
	Y420	Proportional control output, current DC 4 ... 20 mA (I/O points 5 ... 8 only)

For a detailed description of these functions, please refer to document CA110561, "TX-I/O™ functions and operation".

## Type summary

---


<b>ASN</b>	Super universal module <b>TXM1.8X</b> Super universal module <b>TXM1.8X-ML</b> with LCD display and local override
<b>Delivery</b>	The terminal base and the electronic plug-in unit are interconnected and delivered in the same box.
<b>Accessories</b>	The available accessories include address keys, label sheets, and spare transparent label holders. Refer to data sheet CM2N8170.

## Technical and mechanical design

---

For a description of the features common to all TX-I/O™ modules, please refer to the TX-I/O™ Engineering and installation manual, document CM110562.

## Indicators and operator controls

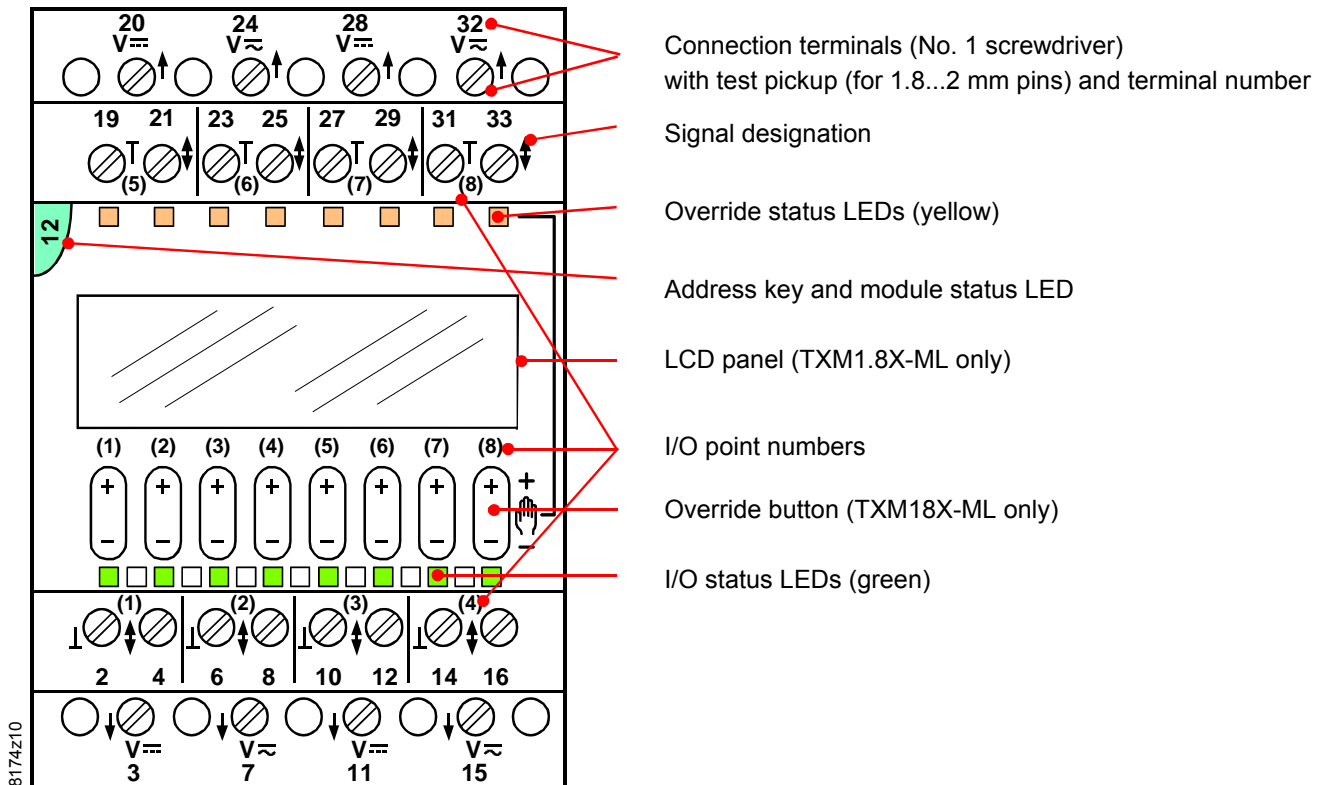

Connection terminals (No. 1 screwdriver) with test pickup (for 1.8...2 mm pins) and terminal number

Signal designation

Override status LEDs (yellow)

Address key and module status LED

LCD panel (TXM1.8X-ML only)

I/O point numbers

Override button (TXM18X-ML only)

I/O status LEDs (green)

### I/O status LEDs

- The I/O status LEDs (green) indicate the status of the inputs and outputs (peripheral devices)
- They are also used for diagnostics

### Module status LED

- The module status LED illuminates the transparent address key
- The LED (green) shows the module status as a whole (as opposed to the status of the I/O points)
- It is also used for diagnostics

### Address key

- The module operates only with the address key inserted
- The module address is mechanically encoded in the address key
- When replacing the I/O module, the address key must be swiveled outward. It remains plugged into in the terminal base.

### Local override and LCD display (TXM1.8X-ML only)

For a detailed description, please refer to document CM110561, "TX-I/O™ Functions and operation".

### Override button

- Pressing an button in the middle enables or disables the local override
- Pressing "+" or "-" respectively increases or reduces the output value.
- Only outputs can be overwritten. Any attempt to overwrite an input results in an error indication.

### Override status LED

- The yellow "Override" LED indicates that local override is active

### LCD display

- The following information is displayed for each I/O point:
  - Configured signal type
  - Symbolic display of process value
  - Information for diagnostics.




Warning

- All safety-relevant functions must be implemented with external solutions
- The local override must not be used for safety shutdown operations
- In compliance with the standard (ISO 16 484-2, Section 3.110), the module executes all local overrides directly, without safety precautions or interlocks.  
→ Full responsibility lies with the operator. ←

## Module labeling

The plug-in I/O module has a removable transparent cover (the label holder) for insertion of a label.

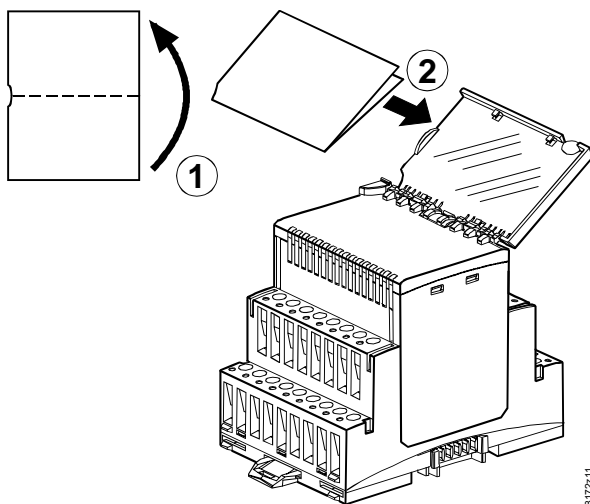

## Disposal



The device includes electrical and electronic components and must not be disposed of as domestic waste.

**Current local legislation must be observed.**

## Engineering, mounting, installation and commissioning

Please refer to the following documents

Document	Number
TX-I/O™ functions and operation	CM110561
TX-I/O™ Engineering and installation manual	CM110562
Replacement of legacy signal types	CM110563
TX-I/O™ Engineering documentation	CM110641 ff



## Mounting

### Permitted orientation

The TX-I/O™ devices can be installed in any orientation:

It is important to provide adequate ventilation so that the admissible ambient temperature (max. 50°C) is not exceeded.

## Technical data

Supply (bus connector on side)	Operating voltage	DC 22.5 ... 26 V	
	Extra low voltage SELV or PELV in accordance with HD384		
	Max. power consumption	TXM1.8X	2.2 W
		TXM1.8X-ML	2.3 W
(for the sizing of power supplies, see CM110562)			
Protection	All terminals of the modules	Against shortcut and incorrect wiring with AC / DC 24 V	
	Bus connector on side	No protection!	
Field devices			
Insulation resistance	The of the connected field devices against mains voltage must comply with the requirements for safety extra-low voltage (SELV) or protection by extra-low voltage (PELV) as per HD 384.		
Measuring cables	Cable material	Solid or stranded copper wire	
	Cable cross section	See manual CM110562	
	Permitted cable length	max. 300 m	
DC output (field supply) (  , Terminals 3, 11, 20, 28)	Nominal voltage (derived in the module from the module supply voltage)	DC24 V	
	Admissible current per module	Max. 200 mA (total for all 4 terminals)	
AC/DC output (field supply)  (  , Terminals 7, 15, 24, 32)	Voltage	AC / DC 12 ... 24 V	
	Admissible current per module	Max. 4 A (total for all 4 terminals)	
	Fuse	T 10A, in power supply module / bus connection module	
Digital inputs / counter inputs	Digital inputs are not electrically separated from the system electronics. Mechanical contacts must be volt-free. Electronic switches must comply with SELV / PELV standards. <i>Counter inputs faster than 1 Hz that are routed for more than 10 m in the same trunking as analog inputs must be shielded.</i>		
	Contact sensing voltage	DC 21.5 ...25 V	
	Contact sensing current	1.0 mA (initial current 6 mA)	
	Contact resistance with contacts closed	Max. 200Ω	
	Contact resistance with contacts open	Min. 50kΩ	
		Min. closing / opening time [ms] including bouncing	Max. bounce time [ms]
	Maintained contact	60	20
	Pulse contact	30	10
	Counter	20	10
			Max. Counting frequency (symmetric)
			25 Hz

## Analog inputs

Correction of line resistance		1 Ω (calibrated in module)	
	Signal type	Range	Resolution (25°C)
Resistance Pt 1000 and resistance transmitter Temp. measurement	P1K	0 ... 2500 Ω	0.333 Ω
	R1K (LG-Ni 1000)	-50 ... +150°C	0.05 K
	T1	-50 ... +130 (150)°C 1) <i>1) (extended range) only with reduced hum injection</i>	0.05 K
Voltage measurement Admissible input voltage	U10	0 ... 10 V max. DC ± 20 V	3.125 mV
Current measurement Admissible input voltage Load resistance	I420 I25	4 ... 20 mA <b>0 ... 20 mA</b> max. DC ± 20 V 490 / 440 ohms, pulsing (cyclic interrogation of the I/O points)	6.25 μA 7.81 μA

## Analog outputs

	Signal type	Range	Resolution
Output voltage Output current	Y10S	0 ... 10 V max. 1 mA	11 mV
Output current <b>I/O points 5 ... 8 only</b> Output voltage Load resistance	Y420	4 ... 20 mA approx. DC 15 V 0 ... 500 ohms	0.016 mA

## Connection terminals

Mechanical design	Rising cage terminals
Solid conductors	1 x 0.5 mm <sup>2</sup> to 4mm <sup>2</sup> or 2 x 0,6 mmØ to 1.5 mm <sup>2</sup>
Stranded conductors without connector sleeves	1 x 0.5 mm <sup>2</sup> to 2.5 mm <sup>2</sup> or 2 x 0,6 mmØ to 1.5 mm <sup>2</sup>
Stranded conductors with connector sleeves (DIN 46228/1)	1 x 0.25 mm <sup>2</sup> to 2.5 mm <sup>2</sup> or 2 x 0,6 mmØ to 1.5 mm <sup>2</sup>
Screwdriver	Slot-headed screws Screwdriver No. 1 <i>with shaft diameter ≤ 4.5 mm</i>
Max. tightening torque	0.6 Nm

## Test pickups (test terminals)


For pin diameter	1.8 ... 2.0 mm
------------------	----------------

## Local override (TXM1.8X-ML only)

Local override / indication device	ISO 16 484-2, Section 3.11
------------------------------------	----------------------------

Classification to EN 60730	Mode of operation of automatic electrical controls	Type 1
	Contamination level	2
	Mechanical design	Protection class III
Housing protection standard	Protection standard to EN 65029	
	Front-plate components in DIN cut-out	IP30
	Terminal base	IP20
Ambient conditions	Operation	To IEC 60721-3-3
	Climatic conditions	Class 3K5
	Temperature	-5 ... 50 °C
	Humidity	5 ... 95 % rh
	Mechanical conditions	Class 3M2
	Operation	To IEC 60721-3-2
	Climatic conditions	Class 2K3
	Temperature	-25...70 °C
	Humidity	5 ... 95 % rh
	Mechanical conditions	Class 2M2
Industry standards	Product safety	
	Automatic electronic controls for household and similar use	EN 60730-1
	Electromagnetic compatibility	
	Interference immunity Industr.environments	EN 61000-6-2
	Emitted interference	
	Residential, commercial and light industrial environments	EN 61000-6-3
	Meets the requirements for CE marking in	
	EMC Directive	89/336/EEC
	Low Voltage Directive	2006/95/EEC
	C-tick conformity	
	in accordance with Australian EMC framework	Radio Communications Act 1992
	Radio Emission Standard	AS/NZS 3548
	UL approval (UL 916, UL 864)	UUKL
Color	Terminal base and plug-in I/O module	RAL 7035 (light gray)
Dimensions	Housing to DIN 43 880, see "Dimensions"	
Weight	With / without packaging	TXM1.8X      194 / 215 g TXM1.8X-ML    211 / 232 g

Digital inputs

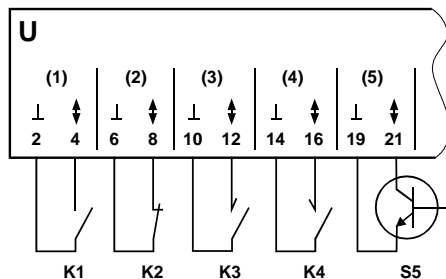

- U** Super universal module
- K1** Status contact (N/O)
- K2** Status contact (N/C)
- K3** Pulse contact (N/O)
- K4** Pulse contact (N/C)
- S5** Electronic switch

8174z13


Terminal layout

I/O point	TXM1.8X, TXM1.8X-ML							
	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
System neutral $\perp$ (-) <sup>1)</sup>	2	6	10	14	19	23	27	31
Input $\updownarrow$ (+)	4	8	12	16	21	25	29	33


 Counter inputs

Counter inputs faster than 1 Hz that are routed for more than 10 m in the same trunking as analog inputs must be shielded.

Analog inputs

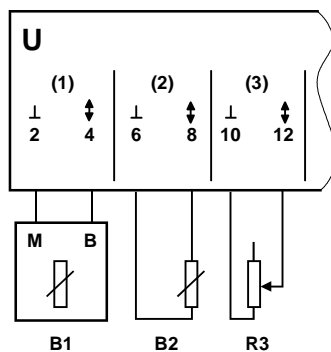

8174z14

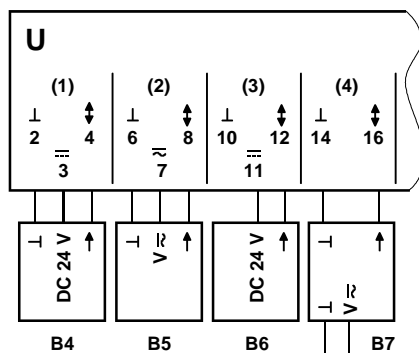


- U** Super universal module
- B1** LG-Ni 1000 temperature sensor
- B2** Pt 1000 temperature sensor
- R3** Resistance-type sensor
- B4** Active sensor with DC 24 V supply
- B5** Active sensor with AC / DC supply
- B6** Active sensor 0 ... 20 or 4 ... 20 mA (2-wire)
- B7** Active sensor with external supply  
*External supply must NOT be earthed (earth loop)*

Terminal layout

I/O point	TXM1.8X, TXM1.8X-ML							
	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
Measuring neutral $\perp$ (-) <sup>1)</sup>	2	6	10	14	19	23	27	31
Input $\updownarrow$ (+)	4	8	12	16	21	25	29	33
AC/DC sensor supply voltage <sup>2)</sup>	Selected from: 7, 15, 24, 32							
DC +24 V sensor supply voltage <sup>3)</sup>	Selected from: 3, 11, 20, 28							



## Analog outputs

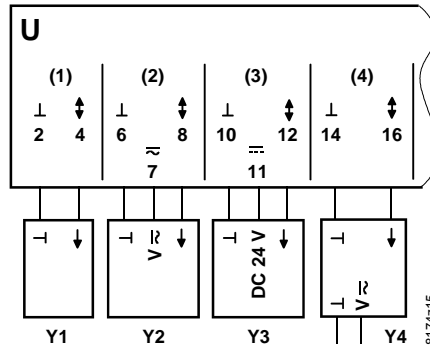

- U** Super universal module
- Y1** Actuator with input  
DC 0 ..10 V or 0 ... 20 mA
- Y2 ... Y4** General device with input  
DC 0 ..10 V or 0 ... 20 mA,  
Supply AC / DC, DC 24 V or  
externally  
*External supply must NOT be  
earthed (earth loop)*

## Terminal layout tension

I/O point	TXM1.8X, TXM1.8X-ML							
	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
System neutral ⊥ (-) <sup>1)</sup>	2	6	10	14	19	23	27	31
Output ⚡ (+)	4	8	12	16	21	25	29	33
AC/DC operating voltage <sup>2)</sup>	Selected from: 7, 15, 24, 32 <sup>2)</sup>							
DC +24 V operating voltage <sup>3)</sup>	Selected from: 3, 11, 20, 28 <sup>3)</sup>							

## Terminal layout current

I/O point	TXM1.8X, TXM1.8X-ML							
	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
System neutral ⊥ (-) <sup>1)</sup>	--	--	--	--	19	23	27	31
Output ⚡ (+)	--	--	--	--	21	25	29	33
AC/DC operating voltage <sup>2)</sup>	Selected from: 7, 15, 24, 32 <sup>2)</sup>							
DC +24 V operating voltage <sup>3)</sup>	Selected from: 3, 11, 20, 28 <sup>3)</sup>							

- 1) All measuring / system neutral terminals are interconnected, not in the terminal base but in the plug-in I/O module. When this unit is pulled outward (into the "parking" position) there is no connection.
  - The system neutral of a digital input can be connected to any system neutral terminal
  - It is also permissible to combine the system neutral conductors of several digital inputs in order to save wire.  
However, the inputs concerned must be on **the same module**.
  - With analog inputs and outputs, the measuring / system neutral must always be connected to the terminal associated with that I/O point.
- 2) All **AC/DC** 24V supply terminals are interconnected (in the I/O module, not in the terminal base).  
They are protected in the **power supply module / bus connection module**.
- 3) All **DC 24 V** supply terminals are interconnected.  
They are protected in the **module** against shortcut and incorrect wiring.

## Dimensions

Dimensions in mm

